



Stainless steel platform shown with i-DT33XW indicator



Mild steel platform and ramp shown with i-DT33P indicator



Affordability, Durability, OHAUS Quality & Value

The OHAUS VE Series floor platforms and scales are the value solution for your dry or washdown weighing needs in industrial and commercial applications. Their high-quality material and construction are designed to minimize distortion under heavy loads, and ensure years of dependable performance. Available also with corresponding ramps and mounting accessories, the OHAUS VE Series floor platforms and scales offers a unique combination of value, quality and dependability that your company can rely on.

Standard Features Include:

- 1,500kg and 3,000kg capacities in three platform sizes: 1m x 1m, 1.25m x 1.25m, 1.5m x 1.5m
- Two platform versions with structural bracing that ensures a stiff and solid construction.
- Two rugged OHAUS indicator models:
 - i-DT33P indicator features a high-impact ABS housing with key-holes on the rear cover for wall mounting
 - i-DT33XW indicator features a 304 stainless steel IP66 PCB housing
- Four x OIML R60 approved IP67 alloy steel load cells
- Four x load cell mounted feet, self-swiveling ball-in-cup design
- Side access IP65 dust and water immersion protected stainless steel junction box with 5m long cable
- Includes two carbon steel eye bolts that allow easier lifting and positioning of the platform
- Available painted steel and stainless ramps with bottom support ribs that resist bending under heavy loads
- Available second stage verified scale models 1:3000e with OHAUS indicators and fixed-location mounting plates
- OHAUS indicators featuring backlit LCD displays with high-visibility 45mm high digits, five weighing units (kg, g, lb, oz, lb:oz), rechargeable lead acid battery operation and piece counting function

VE Serie Floor Platforms and Scales

Platform Models	VE1500S	VE1500R	VE3000R	VE1500L	VE3000L
Platform Material	Painted carbon steel, raised treaded surface, fixed top plate 5mm thick				
Net Weight	83kg	123kg		170kg	
Platform Models	VE1500SW	VE1500RW	VE3000RW	VE1500LW	VE3000LW
Platform Material	Stainless steel, sand-blasted flat surface, fixed top plate 5mm thick				
Net Weight	68kg	101kg		134kg	
Platform Size (A x B x min H)	1m x 1m x 9cm	1.25m x 1.25m x 9cm		1.5m x 1.5m x 9cm	
Capacity x Readability	1500kg x 0.5kg	1500kg x 0.5kg	3000kg x 1kg	1500kg x 0.5kg	3000kg x 1kg
Approval Resolution	1:3000e				
Operating Temperature / Humidity	-10°C to 40°C / 0% to 95% relative humidity, non-condensing				
Maximum Central Load	125% of rated capacity				
Load Cell	4 x IP67 alloy steel, shear beam, OIML C3, 5m cable length				
Load Cell Capacity Emax	1000kg	1000kg	1500kg	1000kg	1500kg
Output Impedance / Excitation Voltage	350 ohm ± 3.5 ohm / 5V~15V, DC/AC				
Feet	4 x self-swiveling ball-in-cup design with rubber bottom, adjustable height				
Junction Box	Side access, IP65, 304 stainless steel, with 5m long cable				
Scale Models (painted, with i-DT33P indicator)*	VE1500S33P	VE1500R33P	VE3000R33P	VE1500L33P	VE3000L33P
Scale Models (SS, with i-DT33XW indicator)*	VE1500S33XW	VE1500R33XW	VE3000R33XW	VE1500L33XW	VE3000L33XW
Indicators	i-DT33P, ABS plastic / i-DT33XW, 304 stainless steel IP66 PCB housing				
Weighing Units	kg, g, lb, oz, lb:oz				
Display	45 mm digit height LCD display with 3-color backlight				
Interface	RS232 included, Optional USB, Ethernet				
Power	i-DT33P, 240VAC or C batteries / i-DT33XW, 240VAC or rechargeable batteries				
Battery life	i-DT33P, 360 hours (backlight off) / i-DT33XW, 100 hours (backlight off)				
Features	Weighing, Counting, Checkweighing, Totalization				

*For 2nd stage EC Type approved Class III models, add "M" at end of scale model name (ex., VE1500S31PM) (will require available foot plate kits in type approved installations)

Options and Accessories

Cable RS232 i-DT33P	80500525
Cable RS232 i-DT33XW	80500552
Ramp kit, VE painted steel, 1m	72198338
Ramp kit, VE painted steel, 1.25m	72198339
Ramp kit, VE painted steel, 1.5m	72198340
Ramp kit, VE-W stainless steel, 1m	72198341
Ramp kit, VE-W stainless steel, 1.25m	72198342
Ramp kit, VE-W stainless steel, 1.5m	72198343
Foot plate kit, VE painted steel	72198344
Foot plate kit, VE-W stainless steel	72198345


Approvals

- **Safety and EMC:** EN60950, EN61326, FCC, CE, CULUS
- **EC Type Approval:**
Load Cell: OIML R60 PTB D09-03.19
- **Quality:** Ohaus quality management system registered to ISO 9001:2008
- **Electromagnetic Compatibility:** IEC/EN 61326-1 Class B, basic environments; FCC Part 15 Class A; Canada ICES-003 Class A


Structural Features



Accessories (Painted Steel & Stainless Steel)

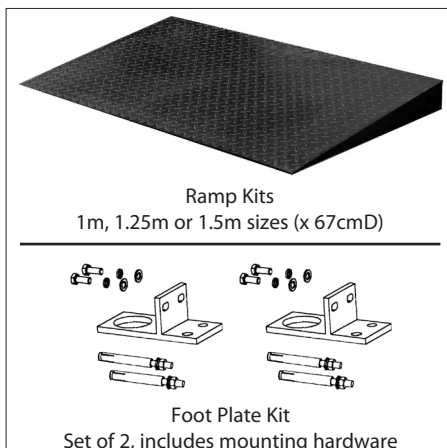

*Outline Dimensions (Platform Size)

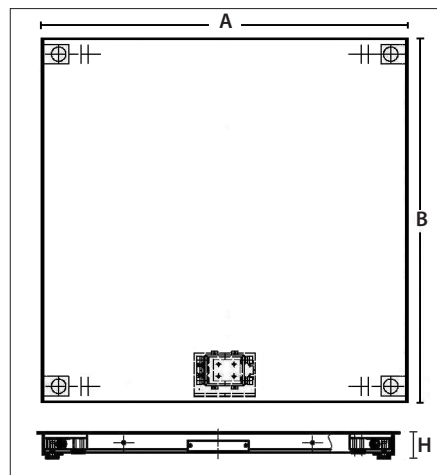

OHAUS Europe GmbH
Im Langacher 44
8606 Greifensee
Switzerland

e-mail: ssc@ohaus.com
Tel: 0041 22 567 53 19
e-mail: tsc@ohaus.com
Tel: 0041 22 567 53 20

www.ohaus.com

OHAUS Corporation is an ISO 9001:2008 manufacturer

ISO 9001:2008
Registered Quality
Management System

